

DAQ10501

0.05 TO 10.0 GHz BROADBAND ANALOG DETECTOR

Typical Values @ +25 °C

DAQ10501

Wide Frequency Range	0.05 to 12.0 GHz
Wide Power Range	-30.0 to +5.0 dBm
Temperature Stability	± 0.25 dB
Flatness	± 0.50 dB
Single or Dual Power Supply	
Cougar Q Package	

SPECIFICATIONS*

Parameter	Typical	Guaranteed	
		0 to 50 °C	-55 to +85 °C
Frequency (Min.)	0.05-12.0 GHz	0.05-10.0 GHz	0.05-10.0 GHz
Input Power Range (Min.)	-30 to 5 dBm	-25 to 0 dBm	-25 to 0 dBm
VSWR (Max.)	1.5:1†	2.0:1†	2.0:1†
Sensitivity, Vout (Min.)	120 mV†	90 mV†	90 mV†
Power Flatness (Max.)			
0.05-8.0 GHz	±0.5 dB^	±0.75 dB^	±0.75 dB^
0.05-10.0 GHz	±0.75 dB^	±1.0 dB^	±1.0 dB^
Temperature Stability (Max.)	±0.25 dB‡	±0.5 dB‡	±0.5 dB‡
Output Offset Voltage, no RF (Max.)	±0.1 dB	±0.5 dB	±0.5 dB
1 dB Square Law Departure	-10 dBm	—	—
Tangential Sensitivity	-45 dBm^^	—	—
Pulse Response, Pin = -15 dBm	1.5 µsec‡	3.0 µsec‡	3.0 µsec‡
Pulse Response, Pin = 0 dBm	3.0 µsec‡	5.0 µsec‡	5.0 µsec‡
Supply Current, no RF	2 +mA, 2 -mA	—	—
Supply Current, Pin = +5 dBm	10 +mA, 2 -mA	—	—

* Measured in a 50-Ohm system at ±5.0 Vdc, 2 KΩ||50 pF unless otherwise specified.
† Pin = -15 dBm. ^ Vout = 100 mV. ^^ 3 dB NF, 1 MHz Bandwidth. ‡ 50% RF to 10 or 90% Video.

MAXIMUM RATINGS

DC Voltage (no RF)	±18 V
Continuous RF Input Power	+14.0 dBm (±5 Vdc)
Operating Case Temperature	-55 °C to +100 °C
Storage Temperature	-65 °C to +125 °C
Burn-In Temperature	+100 °C
Detector Thermal Resistance ¹ (θjc)	+3500 °C/Watt
Temperature Rise @ 0 dBm (Tjc)	+3.5 °C
Temperature Rise @ +5 dBm (Tjc)	+35 °C


¹ Thermal resistance is based on RF input power. Ratings based on +25 °C.

APPLICATION NOTES

- ✦ This unit is DC coupled and employs a RF choke at the input (DC short). If the application calls for the input to sink current there will approximately be an additional 1 mV of output offset voltage for each 3 mA of current. Sink current should be limited to 100 mA max to avoid choke burnout.
- ✦ For higher supply voltages, up to ±15 volts, the positive supply pin must include a series current limiting resistor, $R_s = (V_s - 5)/0.01$. (e.g.: $V_s = 15v$, $R_s = 1K$)
- ✦ Average power detection is obtained at power levels below approximately -13 dBm.
- ✦ For best pulse response both supply pins should be bypassed with an additional 1.0 µF capacitor. The unit contains 0.01 µF internal capacitors.







DAQ10501

SM-25 for Detectors

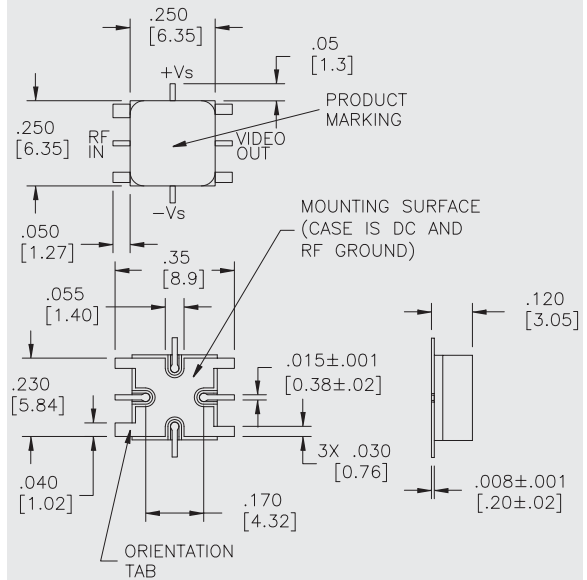

DIMENSIONS ARE IN INCHES [MILLIMETERS]

TYPICAL PERFORMANCE

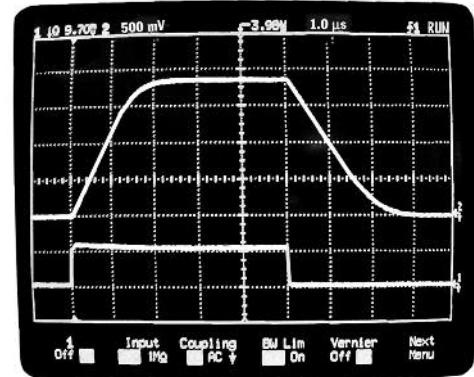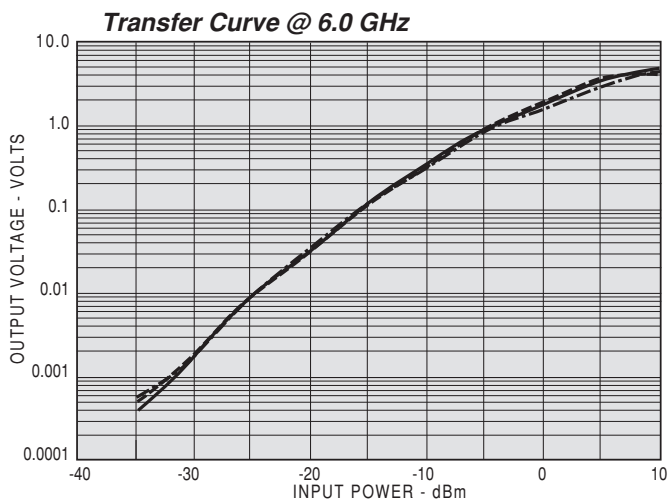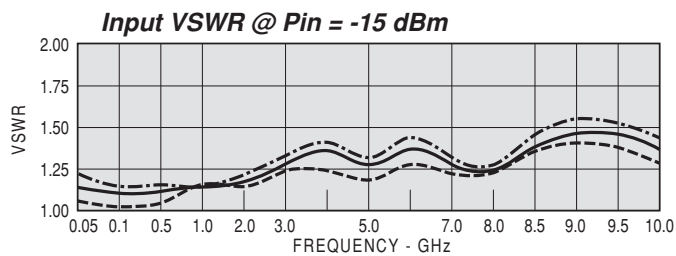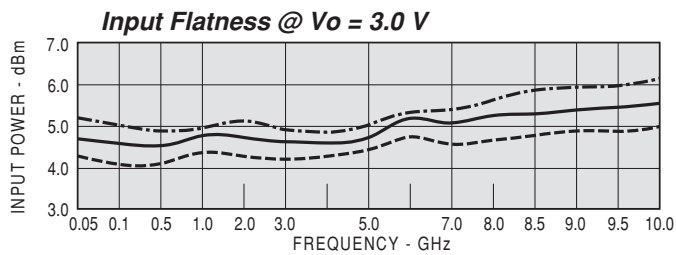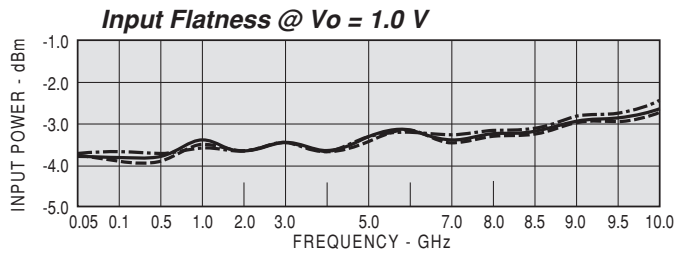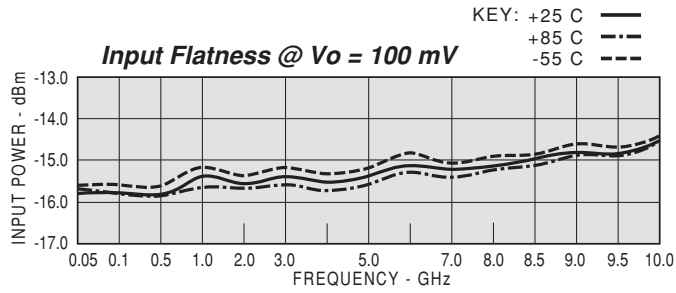

Pulse Response @ $P_{IN} = 0$ dBm



Pulse Response @ $P_{IN} = -15$ dBm