

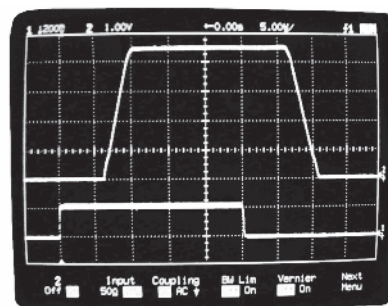
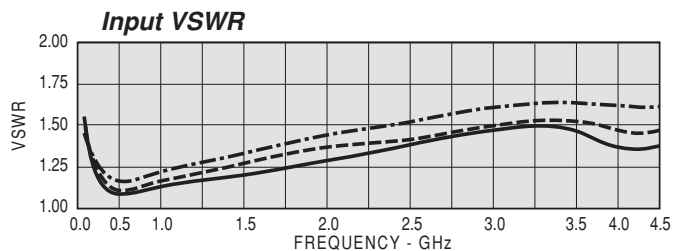
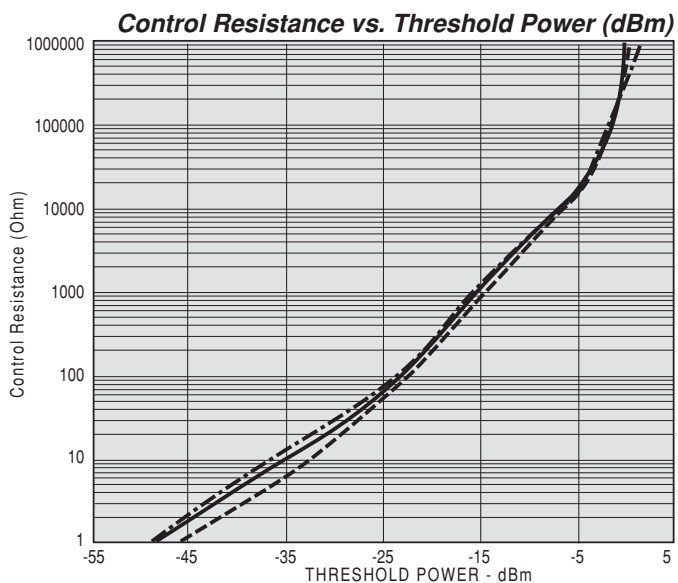
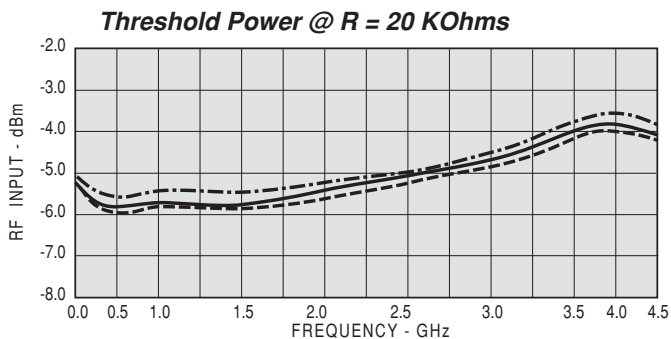
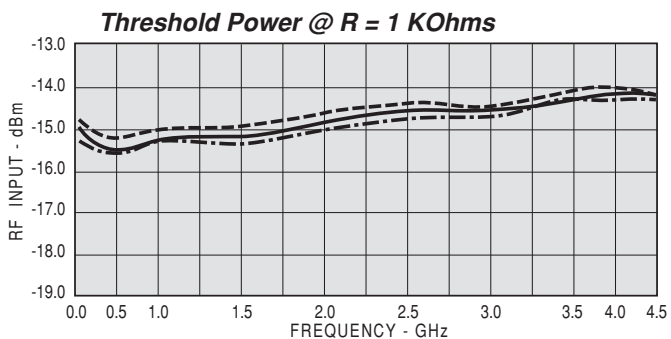


TYPICAL PERFORMANCE


KEY: +25 C —
+85 C - - -
-55 C - · - ·

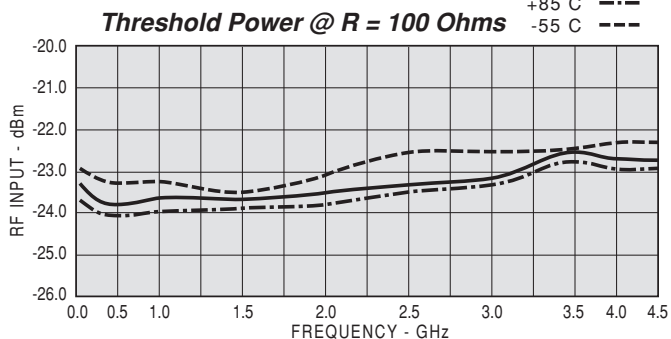

Pulse Response @ $R_{TH} = 100$ Ohms

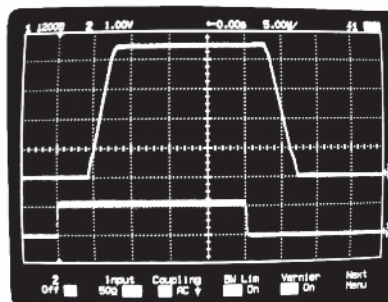

Pulse Response @ $R_{TH} = 1$ KOhms

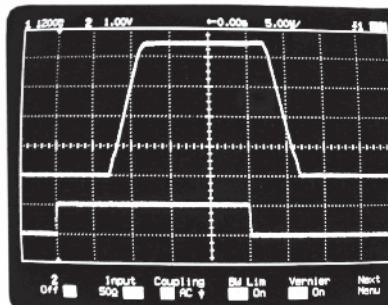

Pulse Response @ $R_{TH} = 20$ KOhms

Top Trace: TTL Logic Out
Bottom Trace: RF Input
Time Base: 5.0 μ s/div