

A2CP5009

2000-5000 MHz COUGARPAK™ AMPLIFIER


Typical Values

High Power Output	+29.5 dBm
High Third Order I.P.	+42 dBm
Medium Gain	8.5 dB
High Performance Thin Film	
Standard Two-stage CougarPak™ Package	

A2CP5009

A2CP5009

CougarPak™ Connectorized Package (two-stage)

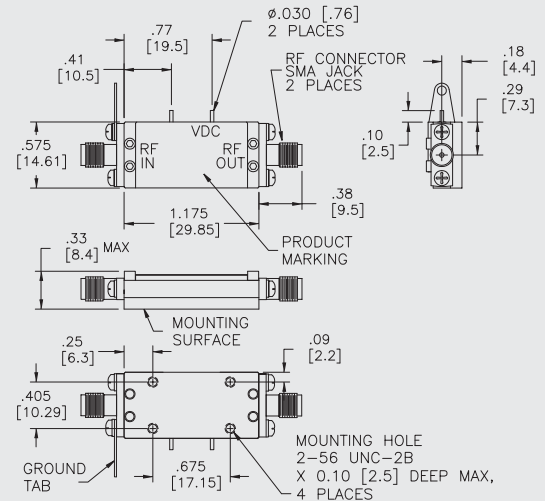

SPECIFICATIONS*

Parameter	Typical	Guaranteed	
		0 to 50 °C	-55 to +85 °C
Frequency (Min.)	1800-5000 MHz	2000-5000 MHz	2000-5000 MHz
Small Signal Gain (Min.)	8.5 dB	7.5 dB	7.0 dB
Gain Flatness (Max.)	±0.7 dB	±1.0 dB	±1.2 dB
Noise Figure (Max.)	5.5 dB	6.0 dB	6.5 dB
SWR (Max.) Input/Output	1.7:1	2.0:1	2.0:1
Power Output (Min.) @ 1dB comp.	+29.5 dBm	+28.5 dBm	+28.0 dBm
Reverse Isolation	22 dB	—	—
DC Current (Max.)	370 mA	390 mA	400 mA

* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.

INTERMODULATION PERFORMANCE


Typical @ 25 °C

Second Order Harmonic Intercept Point	+66 dBm
Second Order Two Tone Intercept Point	+60 dBm
Third Order Two Tone Intercept Point	+42 dBm

A2CP5009

A2CP5009

CougarPak™ Pin Package (two-stage)

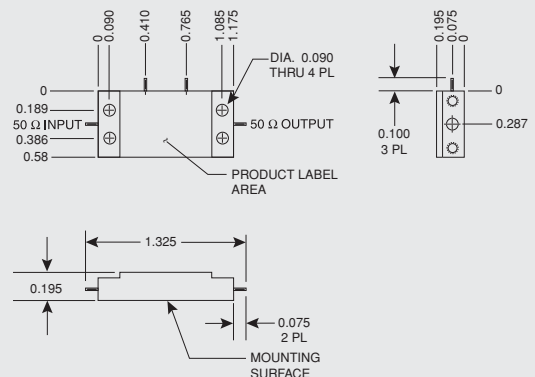

ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-62 to +125 °C
Maximum Case Temperature	+125 °C
Maximum DC Voltage	+17 Volts
Maximum Continuous RF Input Power	+13 dBm
Maximum Short Term Input Power (1 Minute Max.)	50 Milliwatts
Maximum Peak Power (3 μsec Max.)	0.5 Watt
Burn-in Temperature	— °C
Thermal Resistance¹ (θjc)	— °C/Watt
Junction Temperature Rise Above Case (Tjc)	— °C

¹ Thermal resistance is based on total power dissipation.

DIMENSIONS ARE IN INCHES [MILLIMETERS]