

A2CP5127

10 TO 500 MHz COUGARPAK™ AMPLIFIER

Typical Values	A2CP5127
High Gain	26.5 dB
Low Noise Figure	2.5 dB
High Output Level	+27.0 dBm
High Third Order I.P.	+39 dBm
High Reverse Isolation	36 dB
High Performance Thin Film Standard Two-stage CougarPak™ Package	

SPECIFICATIONS*

Parameter	Typical	Guaranteed	
		0 to 50 °C	-55 to +85 °C
Frequency (Min.)	5-600 MHz	10-500 MHz	10-500 MHz
Small Signal Gain (Min.)	26.5 dB	25.0 dB	24.0 dB
Gain Flatness (Max.)	±0.5 dB	±0.7 dB	±0.9 dB
Noise Figure (Max.)	2.5 dB	3.5 dB	4.0 dB
SWR (Max.)	Input/Output	1.9:1	2.0:1
Power Output (Min.) @ 1dB comp.	+27.0 dBm	+25.0 dBm	+24.5 dBm
Reverse Isolation	36 dB	—	—
DC Current (Max.)	220 mA	227 mA	235 mA

* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.

INTERMODULATION PERFORMANCE

Typical @ 25 °C	A2CP5127
Second Order Harmonic Intercept Point	+51 dBm
Second Order Two Tone Intercept Point	+45 dBm
Third Order Two Tone Intercept Point	+39 dBm


ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-62 to +125 °C
Maximum Case Temperature	+125 °C
Maximum DC Voltage	+17 Volts
Maximum Continuous RF Input Power	+2 dBm
Maximum Short Term Input Power (1 Minute Max.)	100 Milliwatts
Maximum Peak Power (3 μsec Max.)	0.5 Watt
Burn-in Temperature	+100 °C
Thermal Resistance ¹ (θjc)	+13 °C/Watt
Junction Temperature Rise Above Case (Tjc)	+36.2 °C

¹ Thermal resistance is based on total power dissipation.

A2CP5127

CougarPak™ Connectorized Package (two-stage)

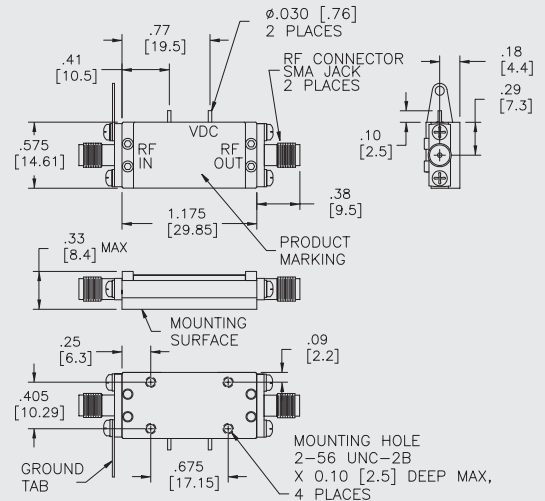

DIMENSIONS ARE IN INCHES [MILLIMETERS]