

# A4CP18240

## 6 TO 18 GHz SOLID STATE POWER AMPLIFIER


*Typical Values*

<b>High Gain</b> .....	<b>40.0 dB</b>
<b>High Output Level</b> .....	<b>1 Watt</b>
<b>High Third Order I.P.</b> .....	<b>+42 dBm</b>
<b>Supply Voltage Internal Regulated</b>	
<b>Ultra-Fast TTL Control Response</b> .....	<b>20 ns</b>
<b>Temperature Compensation for Low Gain Drift over Temp.</b>	
<b>High Performance Thin Film Power Pack SMA Package</b>	

**A4CP18240**

### A4CP18240

**Power Pack SMA Case  
(five-stage)**

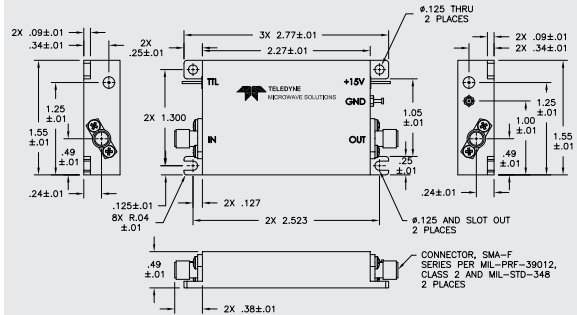

## SPECIFICATIONS\*

Parameter	Typical	Guaranteed	
		0 to 50 °C	-55 to +85 °C
Frequency (Min.)	6-18 GHz	6-18 GHz	6-18 GHz
Small Signal Gain (Min.)	40.0 dB	40.0 dB	40.0 dB
Gain Flatness (Max.)	±0.5 dB	±0.8 dB	±1.0 dB
Noise Figure (Max.)	5.0 dB	5.5 dB	6.0 dB
SWR (Max.) Input/Output	1.7:1	1.9:1	2.0:1
Power Output (Min.) @ 1dB comp. 2-8 GHz	+29.0 dBm	+29.0 dBm	+29.0 dBm
Reverse Isolation	55 dB	—	—
DC Current (Max.)	830 mA	870 mA	900 mA

\* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.

## INTERMODULATION PERFORMANCE

*Typical @ 25 °C*

**A4CP18240**

<b>Second Order Harmonic Intercept Point</b> .....	<b>+64 dBm</b>
<b>Second Order Two Tone Intercept Point</b> .....	<b>+58 dBm</b>
<b>Third Order Two Tone Intercept Point</b> .....	<b>+42 dBm</b>

## ABSOLUTE MAXIMUM RATINGS

<b>Storage Temperature</b> .....	<b>-62 to +125 °C</b>
<b>Maximum Case Temperature</b> .....	<b>+125 °C</b>
<b>Maximum DC Voltage</b> .....	<b>+22 Volts</b>
<b>Maximum Continuous RF Input Power</b> .....	<b>+22 dBm</b>
<b>Burn-in Temperature</b> .....	<b>+105 °C</b>
<b>Thermal Resistance<sup>1</sup> (θ<sub>jc</sub>)</b> .....	<b>+5.23 °C/Watt</b>
<b>Junction Temperature Rise Above Case (T<sub>jc</sub>)</b> .....	<b>+68.3 °C</b>

<sup>1</sup> Thermal resistance is based on total power dissipation.

DIMENSIONS ARE IN INCHES [MILLIMETERS]

# Power Pack SMA Package (5-stage)

