

# AC1019

## 10 TO 1000 MHz TO-8 CASCADABLE AMPLIFIERS

Typical Values	AC1019
High Dynamic Range .....	+116 dBm
High Output Power .....	+22.0 dBm
High Third Order I.P. ....	+35.0 dBm
High Performance Thin Film Standard Size TO-8 Package	

### SPECIFICATIONS\*

Parameter	Typical	Guaranteed	
		0 to 50 °C	-55 to +85 °C
Frequency (Min.)	5-1100 MHz	10-1000 MHz	10-1000 MHz
Small Signal Gain (Min.)	11.5 dB	10.5 dB	10.0 dB
Gain Flatness (Max.)	±0.2 dB	±0.5 dB	±0.8 dB
Noise Figure (Max.)	4.5 dB	6.0 dB	6.5 dB
SWR (Max.) Input/Output	< 1.5:1	1.8:1	2.0:1
Power Output (Min.) dBm @ 1dB comp.	12V 15V +19.0 +22.0	12V 15V +17.5 +20.0	12V 15V +17.0 +19.5
Reverse Isolation	16.0 dB	—	—
DC Current (Max.) mA	70.0 90.0	75.0 94.0	78.0 98.0

\* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.

### INTERMODULATION PERFORMANCE

Typical @ 25 °C; 500 MHz	AC1019
Second Order Harmonic Intercept Point .....	+50 dBm
Second Order Two Tone Intercept Point .....	+44 dBm
Third Order Two Tone Intercept Point .....	+35 dBm


### ABSOLUTE MAXIMUM RATINGS

Storage Temperature .....	-62 to +125 °C
Maximum Case Temperature .....	+125 °C
Maximum DC Voltage .....	+19 Volts
Maximum Continuous RF Input Power .....	+13 dBm
Maximum Short Term Input Power (1 Minute Max.) .....	100 Milliwatts
Maximum Peak Power (3 μsec Max.) .....	0.5 Watt
Burn-in Temperature .....	+100 °C
Thermal Resistance <sup>1</sup> (θjc) .....	+26 °C/Watt
Junction Temperature Rise Above Case (Tjc) .....	+36.8 °C

<sup>1</sup>Thermal resistance is based on total power dissipation.


### AC1019

#### TO-8 Package for Amplifiers

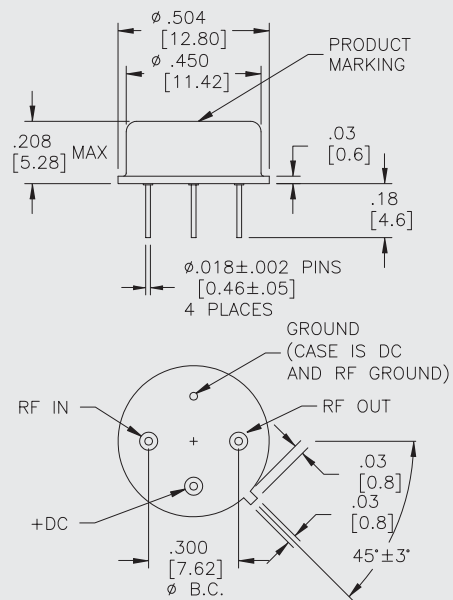

### AS1019






#### SMT0-8 Package for Amplifiers

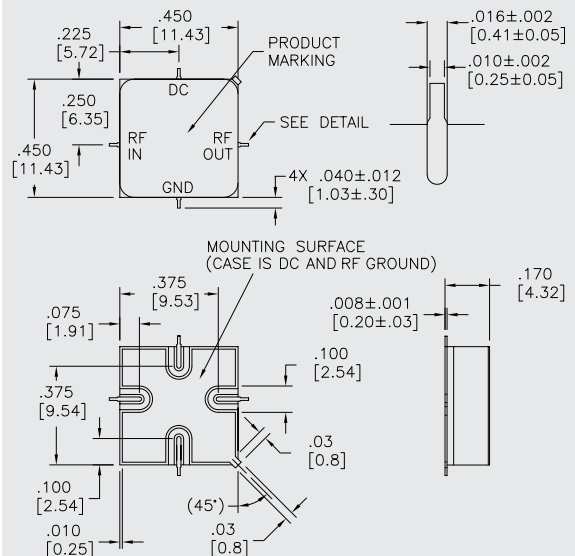

DIMENSIONS ARE IN INCHES [MILLIMETERS]

**TYPICAL PERFORMANCE**

**TYPICAL AUTOMATIC TEST DATA**

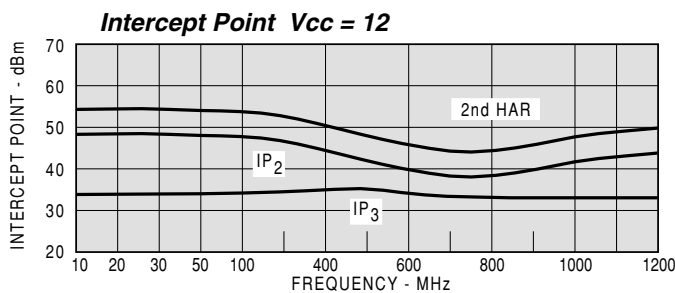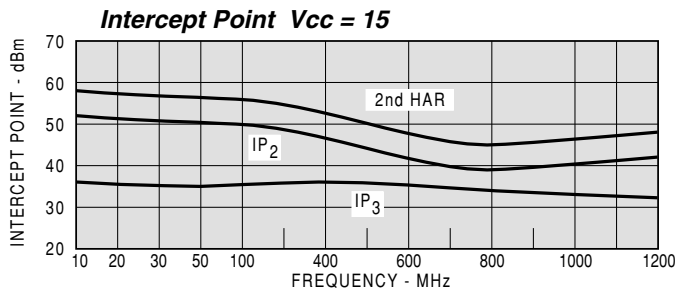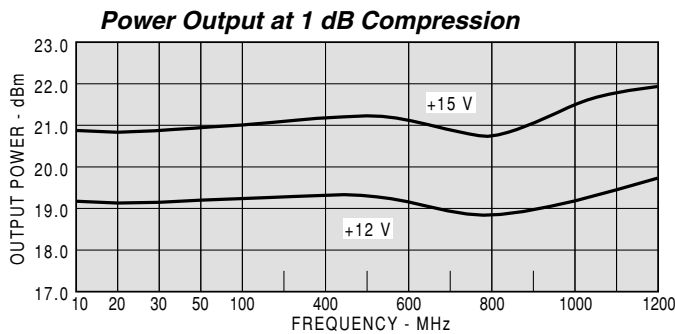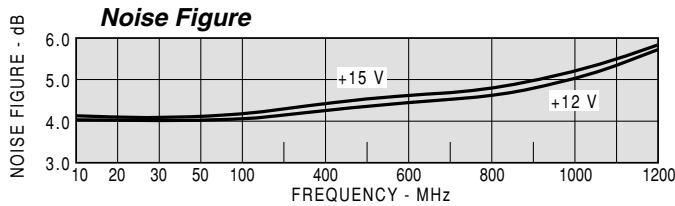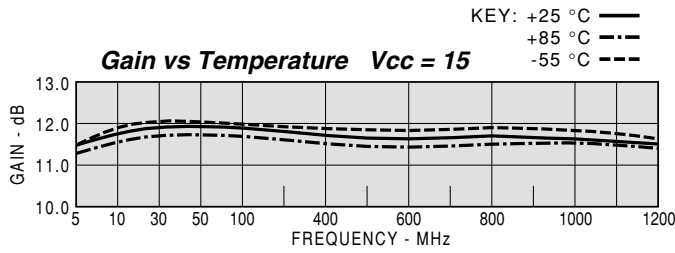

Model: AC1019		Vcc=+15V				Icc=88.57	
FREQ	SWR	SWR	GAIN	PHASE	GROUP DELAY	REV/ISO	
MHZ	IN	OUT	DB	DEG	NSEC	DB	
5	1.80	1.40	10.88	-150		-16.5	
10	1.43	1.33	11.26	-166		-16.5	
20	1.32	1.31	11.43	-175	2.6	-16.4	
50	1.28	1.30	11.48	175	0.93	-16.4	
100	1.27	1.30	11.45	165	0.56	-16.4	
200	1.28	1.32	11.34	147	0.48	-16.4	
300	1.31	1.34	11.23	131	0.45	-16.3	
400	1.34	1.35	11.14	115	0.44	-16.2	
500	1.34	1.34	11.14	99	0.44	-16.0	
600	1.34	1.30	11.14	84	0.44	-15.8	
700	1.30	1.22	11.22	67	0.45	-15.5	
800	1.22	1.14	11.34	50	0.47	-15.3	
900	1.11	1.19	11.47	33	0.49	-15.0	
1000	1.07	1.45	11.63	14	0.53	-14.7	
1100	1.31	1.92	11.71	-6	0.56	-14.5	
1200	1.74	2.82	11.63	-29	0.62	-14.5	

Model: AC1019

Vcc=+15V

Icc=88.57

FREQ.	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
5	0.29	-99.2	3.50	-150.2	0.149	26.3	0.17	-147.7
10	0.18	-121.0	3.66	-165.8	0.149	12.5	0.14	-163.3
20	0.14	-142.8	3.73	-175.0	0.151	5.2	0.13	-175.7
50	0.12	-160.7	3.75	174.9	0.151	-0.9	0.13	170.8
100	0.12	-164.8	3.74	164.7	0.151	-6.2	0.13	157.0
200	0.12	-161.5	3.69	147.4	0.152	-14.2	0.14	133.2
300	0.13	-157.6	3.65	131.2	0.153	-21.6	0.14	114.9
400	0.14	-155.8	3.60	115.3	0.155	-29.5	0.15	99.7
500	0.15	-157.3	3.61	99.4	0.158	-37.2	0.14	87.7
600	0.15	-159.6	3.60	83.6	0.162	-45.5	0.13	80.2
700	0.13	-162.0	3.64	67.4	0.168	-54.6	0.10	79.2
800	0.10	-165.1	3.69	50.4	0.172	-64.4	0.07	100.4
900	0.05	-161.0	3.75	33.0	0.178	-75.0	0.09	149.1
1000	0.03	-42.9	3.81	13.8	0.183	-86.8	0.18	160.3
1100	0.14	-24.3	3.85	-6.5	0.188	-100.2	0.32	152.9
1200	0.27	-30.9	3.81	-28.8	0.189	-115.4	0.48	138.7

Model: AC1019

Vcc=+12V

Icc=70.25

FREQ	SWR	SWR	GAIN	PHASE	GROUP DELAY	REV/ISO	
MHZ	IN	OUT	DB	DEG	NSEC	DB	
5	1.79	1.39	10.83	-151		-16.5	
10	1.42	1.32	11.22	-166		-16.5	
20	1.31	1.30	11.39	-175	2.6	-16.4	
50	1.27	1.28	11.45	175	0.92	-16.4	
100	1.27	1.29	11.42	165	0.56	-16.4	
200	1.28	1.30	11.30	147	0.48	-16.3	
300	1.31	1.32	11.20	131	0.45	-16.3	
400	1.35	1.32	11.11	115	0.44	-16.1	
500	1.36	1.31	11.11	99	0.45	-15.9	
600	1.36	1.27	11.11	83	0.44	-15.7	
700	1.33	1.20	11.20	67	0.45	-15.3	
800	1.24	1.15	11.32	50	0.48	-15.1	
900	1.13	1.26	11.45	32	0.49	-14.8	
1000	1.05	1.56	11.62	12	0.54	-14.5	
1100	1.31	2.11	11.66	-8	0.57	-14.3	
1200	1.77	3.18	11.55	-31	0.64	-14.2	

Model: AC1019

Vcc=+12V

Icc=70.25

FREQ.	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
5	0.28	-99.1	3.48	-150.6	0.150	25.8	0.16	-146.3
10	0.17	-120.9	3.64	-165.9	0.150	12.4	0.14	-162.3
20	0.13	-142.6	3.71	-175.2	0.151	5.3	0.13	-175.3
50	0.12	-160.1	3.74	174.8	0.152	-0.8	0.12	171.5
100	0.12	-163.9	3.73	164.7	0.151	-6.0	0.13	157.7
200	0.12	-160.1	3.67	147.3	0.152	-14.0	0.13	134.9
300	0.14	-156.6	3.63	131.0	0.153	-21.3	0.14	117.3
400	0.15	-154.4	3.59	115.0	0.156	-28.9	0.14	102.8
500	0.15	-156.7	3.59	99.0	0.160	-36.9	0.13	91.7
600	0.15	-159.4	3.59	83.0	0.164	-45.2	0.12	86.3
700	0.14	-162.7	3.63	66.7	0.171	-54.2	0.09	90.5
800	0.11	-168.0	3.68	49.5	0.176	-63.8	0.07	120.8
900	0.06	-169.6	3.74	31.8	0.181	-74.4	0.11	156.0
1000	0.02	-28.3	3.81	12.4	0.188	-86.8	0.22	160.2
1100	0.13	-18.5	3.83	-8.2	0.193	-100.5	0.36	151.6
1200	0.28	-28.2	3.78	-31.1	0.194	-116.0	0.52	136.9