

AC2386

1700 TO 2300 MHz TO-8 CASCADABLE AMPLIFIER

Typical Values

| | |
|-------------------------------------|--------------------------|
| High Gain | AC2386 22.0 dB |
| Ultra Low Noise Figure | 1.3 dB |
| Medium Output Power | +12.0 dBm |
| High Performance Thin Film | |
| Standard Size TO-8 Package | |

SPECIFICATIONS*

| Parameter | Typical | Guaranteed | |
|---|---------------|---------------|---------------|
| | | 0 to 50 °C | -55 to +85 °C |
| Frequency (Min.) | 1600-2300 MHz | 1700-2300 MHz | 1700-2300 MHz |
| Small Signal Gain (Min.) | 22.0 dB | 21.0 dB | 20.5 dB |
| Gain Flatness (Max.) | ±0.7 dB | ±0.9 dB | ±1.0 dB |
| Noise Figure (Max.) | 1.3 dB | 1.6 dB | 1.9 dB |
| SWR (Max.) Input/Output | 1.4:1 | 1.6:1 | 1.8:1 |
| Power Output (Min.) @ 1dB comp. | +12.0 dBm | +11.0 dBm | +10.0 dBm |
| DC Current (Max.) | 40 mA | 43 mA | 46 mA |

* Measured in a 50-ohm system at +15 Vdc unless otherwise specified.

INTERMODULATION PERFORMANCE

Typical @ 25 °C

| | |
|--|--------------------------|
| Second Order Harmonic Intercept Point | AC2386 +47 dBm |
| Second Order Two Tone Intercept Point | +41 dBm |
| Third Order Two Tone Intercept Point | +24 dBm |


ABSOLUTE MAXIMUM RATINGS

| | |
|---|----------------|
| Storage Temperature | -62 to +125 °C |
| Maximum Case Temperature | +125 °C |
| Maximum DC Voltage | +17 Volts |
| Maximum Continuous RF Input Power | +17 dBm |
| Maximum Short Term Input Power (1 Minute Max.) | 100 Milliwatts |
| Maximum Peak Power (3 μsec Max.) | 0.5 Watt |
| Burn-in Temperature | +100 °C |
| Thermal Resistance¹ (θjc) | — °C/Watt |
| Junction Temperature Rise Above Case (Tjc) | — °C |

¹ Thermal resistance is based on total power dissipation.


AC2386

TO-8 Package for Amplifiers

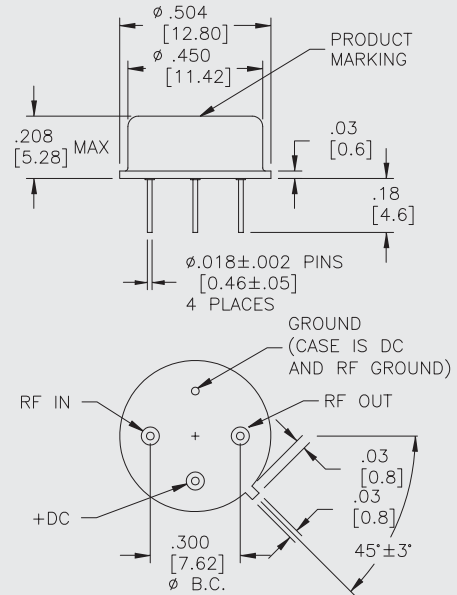

AS2386

SMT0-8 Package for Amplifiers

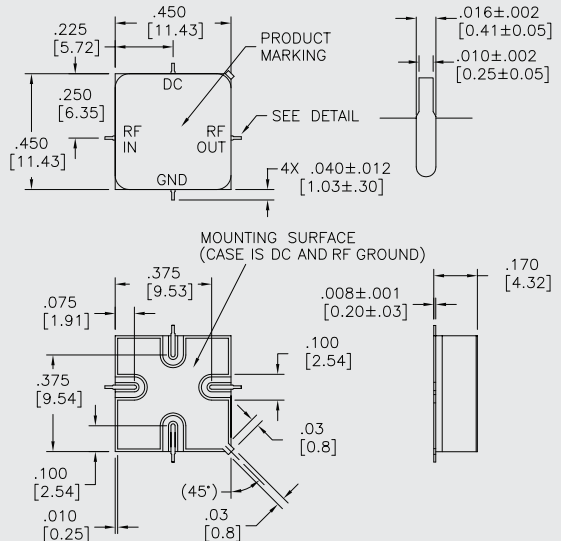

DIMENSIONS ARE IN INCHES [MILLIMETERS]