

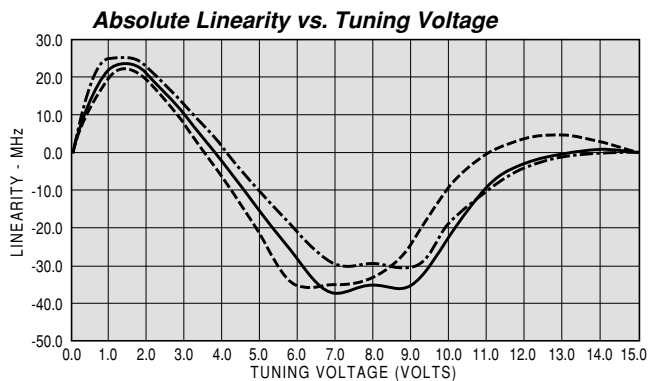
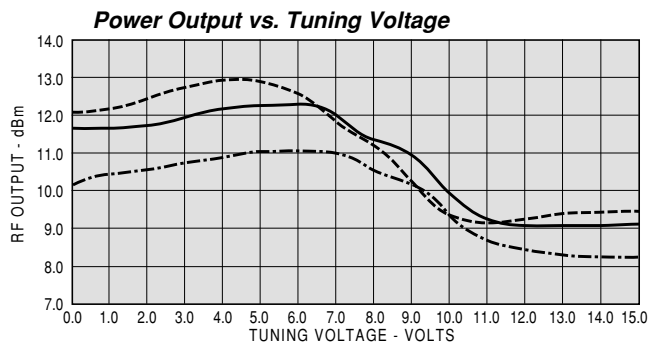


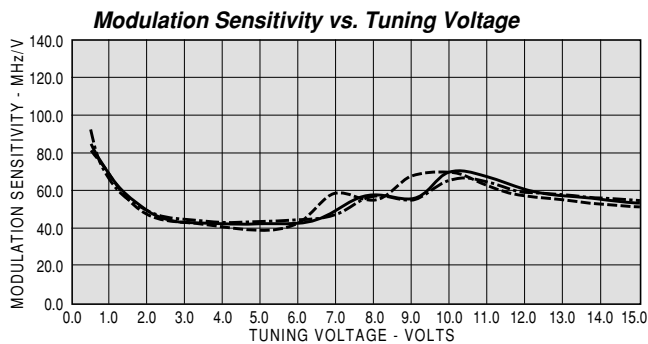

**TYPICAL PERFORMANCE**

**TYPICAL AUTOMATIC TEST DATA**

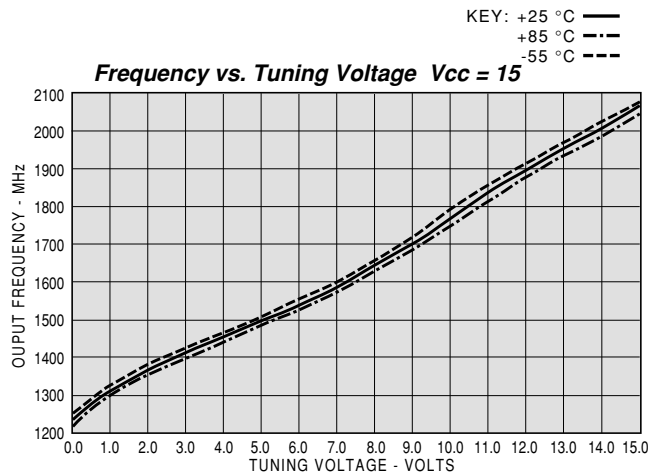

Model: OC2000      Vcc= +15V      Vstr mA = 54.02      Vstop mA = 51.68

TUNING VOLTAGE V	FREQ. MHz	POWER dBm	MODULATION SENSITIVITY MHz/V	LINEARITY MHz
0.0	1235.81	11.66	0.00	0.00
0.5	1277.80	11.72	84.41	14.52
1.0	1312.96	11.65	68.86	21.49
1.5	1342.39	11.62	59.27	23.51
2.0	1367.18	11.71	49.90	20.87
2.5	1389.67	11.83	45.29	15.94
3.0	1411.85	11.96	43.44	9.93
3.5	1432.97	12.07	42.60	3.68
4.0	1453.93	12.17	42.22	-2.77
4.5	1474.92	12.24	42.18	-9.25
5.0	1495.85	12.29	42.22	-15.69
5.5	1517.42	12.31	42.23	-22.32
6.0	1538.46	12.29	42.31	-28.74
6.5	1560.15	12.20	43.65	-34.49
7.0	1584.79	11.97	49.44	-37.36
7.5	1613.79	11.62	56.90	-36.51
8.0	1642.62	11.35	57.98	-35.13
8.5	1669.10	11.21	53.28	-36.09
9.0	1696.90	10.94	55.95	-35.72
9.5	1730.55	10.44	65.94	-30.25
10.0	1765.24	9.93	69.98	-22.93
10.5	1800.01	9.51	69.95	-15.60
11.0	1833.45	9.24	67.19	-9.64
11.5	1864.92	9.11	63.38	-5.59
12.0	1895.61	9.07	60.23	-3.03
12.5	1924.77	9.06	58.63	-1.33
13.0	1953.29	9.07	57.45	-0.22
13.5	1981.45	9.07	56.47	0.41
14.0	2009.82	9.07	55.64	0.63
14.5	2037.33	9.06	55.32	0.68
15.0	2064.07	9.10	53.83	0.00

