



Thin-Film Cascadable Amplifier 10 to 1000 MHz

Technical Data

UTO/UTC 1043 Series

Features

- **Frequency Range: 10 to 1000 MHz**
- **High Dynamic Range**
- **Low Noise Figure: 2.5 dB (Typ)**
- **Medium Power Output: +8.0 dBm (Typ)**
- **Temperature Compensated**
- **Surface Mount Option**

Applications


- **Wideband RF System Front End**
- **Surface Mount Assembly**

Description


The 1043 Series is a thin-film bipolar RF amplifier using lossless feedback for low noise, high dynamic range and efficient operation; and active bias circuits to assure good temperature compensation and increased immunity to bias voltage variations. The 1043 Series amplifiers are available in three packages: the surface mount PlanarPak PP-38 (.375 in. x .375 in.) case, the TO-8 hermetic case and the connectorized TC-1A case.

Pin Configuration


UTO—TO-8T



UTC—TC-1A



Schematic

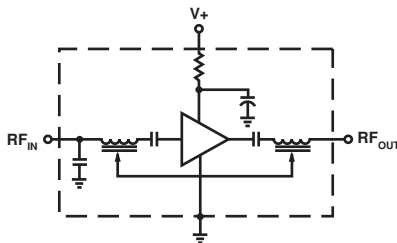

Maximum Ratings

Parameter	Maximum
DC Voltage	+17 Volts
Continuous RF Input Power	+13 dBm
Operating Case Temperature	-55 to +125°C
Storage Temperature	-62 to +150°C
"R" Series Burn-In Temperature	+125°C

Thermal Characteristics¹

θ_{JC}	105°C/W
Active Transistor Power Dissipation	176 mW
Junction Temperature Above Case Temperature	19°C
MTBF (MIL-HDBK-217E, A_{UF} @ 90°C)	767,000 Hrs.

Weight: (typical) PPA—0.5 grams; UTO—2.1 grams; UTC—21.5 grams

Electrical Specifications¹









(Measured in 50 Ω system @ +15 VDC nominal unless otherwise noted)

Symbol	Characteristic	Typical $T_C = 25^\circ\text{C}$	Guaranteed Specifications		Unit
			$T_C = 0 \text{ to } 50^\circ\text{C}$	$T_C = -55 \text{ to } +85^\circ\text{C}$	
BW	Frequency Range	10-1000	10-1000	10-1000	MHz
GP	Small Signal Gain (Min.)	10.5	10.0	9.0	dB
—	Gain Flatness (Max.)	± 0.5	± 1.0	± 1.0	dB
NF	Noise Figure (Max.)	2.5	4.0	4.5	dB
P _{1dB}	Power Output @ +1 dB Comp. (Min.)	+8.0	+6.0	+6.0	dBm
—	Input VSWR (Max.)	<1.5:1	2.0:1	2.0:1	—
—	Output VSWR (Max.)	<1.7:1	2.0:1	2.0:1	—
IP ₃	Two Tone 3rd Order Intercept Point	+19.0	—	—	dBm
IP ₂	Two Tone 2nd Order Intercept Point	+28.0	—	—	dBm
HP ₂	One Tone 2nd Harmonic Intercept Point	+35.0	—	—	dBm
I _D	DC Current	25	—	—	mA

Note: 1. Both RF input and RF output pins are at DC ground—no blocking capacitor.

Typical Performance Over Temperature (@ +15 VDC unless otherwise noted)

Key: +25°C ———
+85°C - - - -
-55°C ———

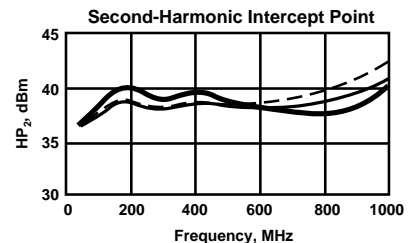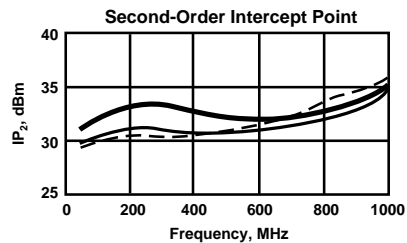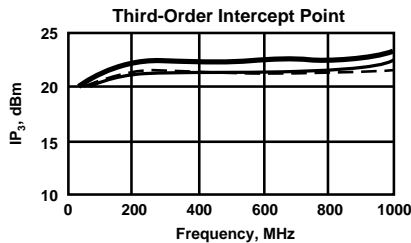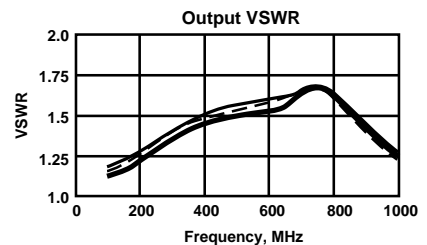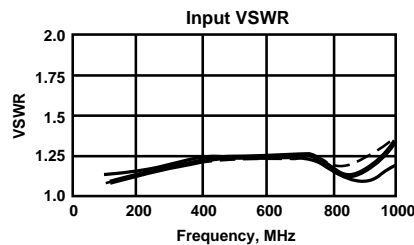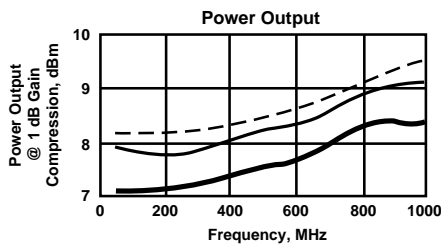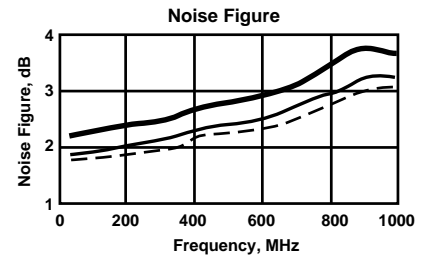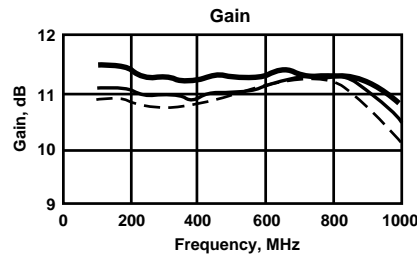

Automatic Network Analyzer Measurements (Typical production unit @ +25°C ambient)



Numerical Readings
Bias = 15.00 Volts

FREQUENCY MHz	VSWR IN	GAIN dB	PHASE DEGREES	PHASE DEV	GROUP DELAY ns	VSWR OUT	ISOLATION dB
100.0	1.09	10.77	160.26	-5.71	.00	1.17	16.80
200.0	1.19	10.67	152.36	-4.78	.43	1.35	16.72
300.0	1.29	10.67	137.24	-3.07	.42	1.53	17.08
400.0	1.36	10.72	122.72	-.75	.39	1.69	17.24
500.0	1.39	10.83	108.58	1.94	.40	1.79	17.32
600.0	1.38	10.95	94.02	4.22	.42	1.81	17.39
700.0	1.32	11.05	78.88	5.71	.44	1.74	17.40
800.0	1.22	11.19	61.92	5.79	.48	1.58	17.35
900.0	1.08	11.14	43.90	4.59	.52	1.35	17.29
1000.0	1.08	10.95	25.03	2.56	.54	1.10	17.20
1100.0	1.25	10.43	5.65	.02	.56	1.15	17.43
1200.0	1.44	9.69	-14.26	-3.04	.51	1.45	17.60
1300.0	1.61	8.73	-31.95	-3.90	.47	1.80	18.14
1400.0	1.73	7.63	-48.41	-3.53	.44	2.16	18.72
1500.0	1.80	6.46	-63.92	-2.20	.00	2.56	19.37

S-Parameters
Bias = 15.00 Volts


FREQUENCY MHz	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	Mag	Ang	dB	Ang	dB	Ang	Mag	Ang
100.00	.043	132.7	10.733	167.3	-16.533	169.4	.074	114.0
150.00	.065	104.3	10.682	159.2	-16.771	161.0	.109	96.5
200.00	.088	87.0	10.607	151.1	-16.946	154.2	.149	83.7
250.00	.113	73.5	10.572	143.2	-16.949	147.6	.181	73.9
300.00	.131	65.9	10.599	135.6	-17.247	140.9	.207	65.2
350.00	.146	57.4	10.632	126.0	-17.155	134.5	.233	57.7
400.00	.154	49.2	10.685	120.6	-17.085	129.0	.252	50.8
450.00	.161	41.2	10.757	113.5	-17.273	123.3	.267	43.5
500.00	.163	34.0	10.784	105.9	-17.291	117.7	.277	36.7
550.00	.158	26.5	10.885	98.6	-17.319	112.0	.280	30.0
600.00	.151	20.2	10.865	91.0	-17.320	106.5	.281	23.6
650.00	.142	12.0	11.017	83.1	-17.373	100.9	.273	17.1
700.00	.125	4.5	11.080	75.0	-17.426	96.1	.259	9.9
750.00	.103	-4.6	11.173	66.5	-17.279	90.3	.239	3.0
800.00	.080	-14.7	11.216	57.7	-17.303	84.6	.211	-4.0
850.00	.052	-24.8	11.235	48.6	17.327	78.6	.176	-11.9
900.00	.017	-53.0	11.167	39.0	-17.281	72.6	.132	-18.4
950.00	.025	177.0	11.113	29.1	-17.233	66.6	.085	-25.8
1000.00	.057	153.7	10.971	19.4	-17.276	60.7	.032	-28.0
1100.00	.131	128.2	10.422	-.7	-17.405	47.6	.083	125.0
1200.00	.188	112.5	9.693	-21.0	-17.669	34.8	.193	112.1
1300.00	.236	88.9	8.713	-39.0	-18.138	22.0	.291	99.6
1400.00	.259	87.9	7.607	-56.0	-18.694	10.0	.368	86.4
1500.00	.279	80.0	6.496	-72.2	-19.401	-1.2	.433	78.7

Product Options

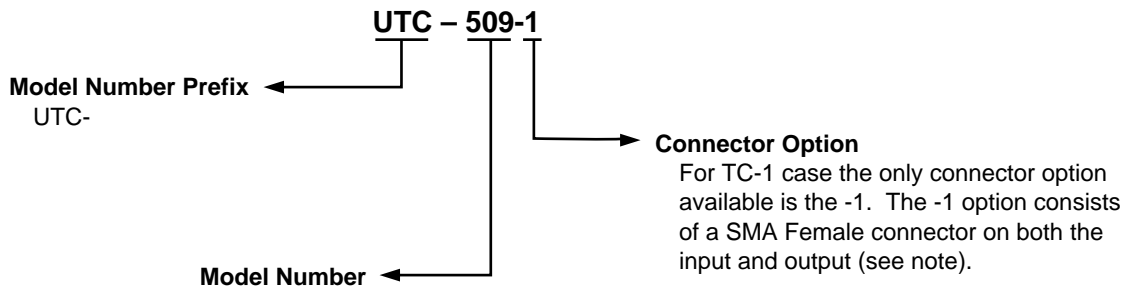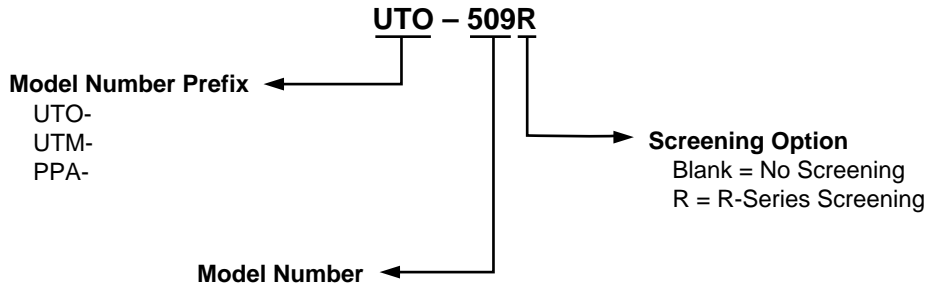

Note: R-Series screening is not available in the TC-1 case as the case is non-hermetic.


Case Drawings TO-8T

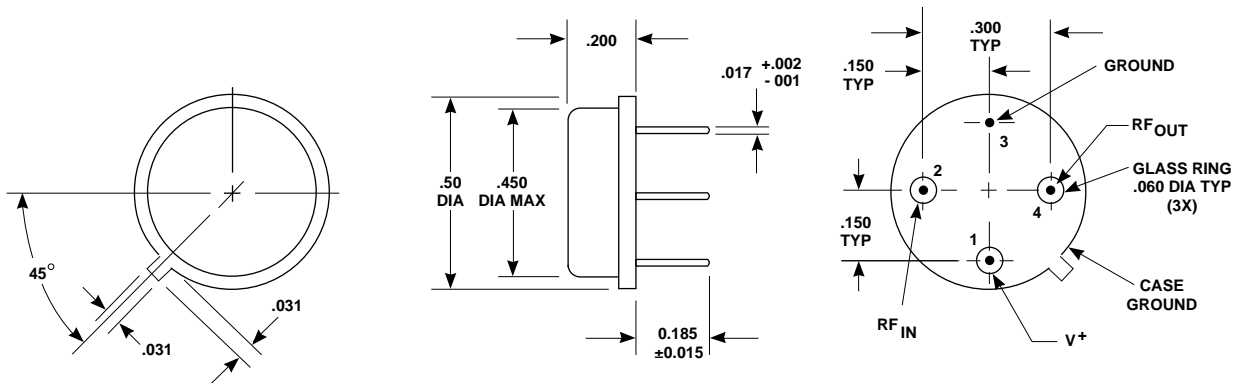

APPROXIMATE WEIGHT 2.1 GRAMS

- NOTES (UNLESS OTHERWISE SPECIFIED):**
 1. DIMENSIONS ARE SPECIFIED IN INCHES
 2. TOLERANCES: xx ± .02
 xxx ± .010

Case Drawings TC-1

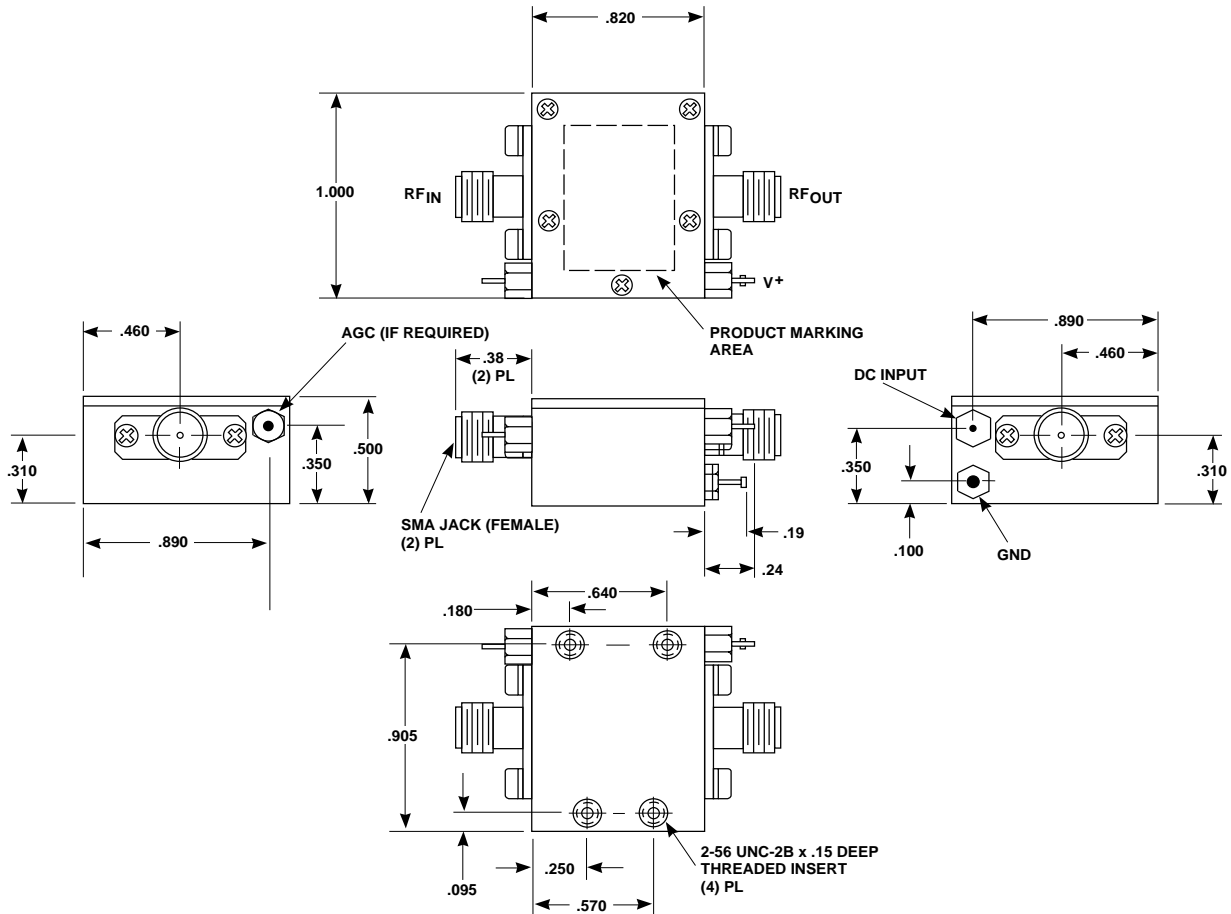

TYPICAL WEIGHT WITH CONNECTORS = 21.5 GRAMS

- NOTES: 1. THE TC-1 CASE IS A NON-HERMETIC CASE.
2. THE ONLY CONNECTOR OPTION AVAILABLE FOR THE TC-1 CASE IS THE -1, SMA FEMALE CONNECTORS AT BOTH INPUT AND OUTPUT PORTS.

- NOTES (UNLESS OTHERWISE SPECIFIED):
1. DIMENSIONS ARE SPECIFIED IN INCHES
2. TOLERANCES: xx ± .02
xxx ± .010

Contact Teledyne Microwave Solutions:
650-691-9800
650-962-6845 fax

Check for updates:
www.teledynemicrowave.com