



# High Efficiency, Class A, 1 Watt Amplifier 10 to 1000 MHz

## Technical Data

### UTO/UTC-1065


#### Features

- **1 Watt Output Power**
- **Low Current: 470 mA**
- **18 Volt Bias**
- **Guaranteed Performance -55 to +85°C**
- **Hermetic TO-3 Package**
- **SMA Connected Case Option**

#### Applications

- **UHF/VHF Transmitters**
- **Communication Circuits**
- **Mobile Radio**
- **Bench Top**
- **Radar Systems**
- **ECM Systems**


#### Schematic

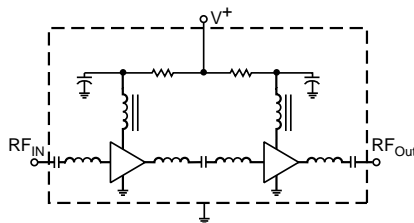


#### Description

The UTO-1065 is a wideband, high efficiency, Class A, 1 watt amplifier, designed to provide broadband power for a wide variety of applications. The amplifier uses all silicon bipolar transistors to provide ultra reliable performance over the full military temperature range. Applications include bench top test sets, transmitter driver and output stages, and other applications that require high intercept points. Inputs and outputs are matched to 50 Ω for easy integration into new and existing systems. Available packaging for this unit is a hermetic TO-3 or the connectorized UCS-1P case.

#### Pin Configuration UTO—TO-3



#### UTC—UCS-1P



#### Maximum Ratings

Parameter	Maximum
DC Voltage	20 Volts
Continuous RF Power (CW or Pulse)	+20 dBm
Operating Case Temperature Range UTO/UTC	-55 to +85°C
Storage Temperature	-62 to +150°C
"R" Series Burn-In Temperature (T <sub>c</sub> )	+85°C

#### Thermal Characteristics<sup>1</sup>

θ <sub>JC</sub>	45°C/W, 45°C/W <sup>2</sup>
Active Transistor Power Dissipation	1.1 W, 1.45 W <sup>2</sup>
Junction Temperature Above Case Temperature	50°C, 65°C <sup>2</sup>

Notes:

1. Values refer to first, second, and third stage transistors, respectively.

**Weight:** (typical) UTO — 14.5 grams; UTC — 281 grams

## Electrical Specifications


(Measured in 50  $\Omega$  system,  $V_{CC} = +18$  V unless otherwise noted)

Symbol	Characteristic	Typical $T_C = 25^\circ\text{C}$	Guaranteed Specifications		Unit
			$T_C = 0$ to $50^\circ\text{C}$	$T_C = -55$ to $+85^\circ\text{C}^1$	
BW	Frequency Range	10-1000	10-1000	10-1000	MHz
GP	Small Signal Gain (Min.)	14.5	12.5	12.0	dB
—	Gain Flatness (Max.)	$\pm 0.5$	$\pm 1.0$	$\pm 1.5$	dB
NF	Noise Figure (Max.)	9	11.0	12.0	dB
$P_{1dB}$	Power Output @ +1 dB Comp. (Min.)	+30.0	+28	+27.5	dBm
VSWR	Input VSWR (Max.)	1.8	2.2:1	2.5:1	—
VSWR	Output VSWR (Max.)	1.8	2.2:1	2.5:1	—
$IP_3$	Two Tone 3rd Order Intercept Point	+40	—	—	dBm
$IP_2$	Two Tone 2nd Order Intercept Point	+58.0	—	—	dBm
$HP_2$	One Tone 2nd Harmonic Intercept Pt.	+52.0	—	—	dBm
$I_D$	DC Current	470	—	—	mA
—	Phase Noise @ 500 MHz; 1 kHz Offset	-165	—	—	dBc/Hz

Note 1: UTO version only

## Typical Performance Over Temperature (@ +18 VDC unless otherwise noted)

Key: +25°C ———  
+85°C - - - -  
-55°C ———


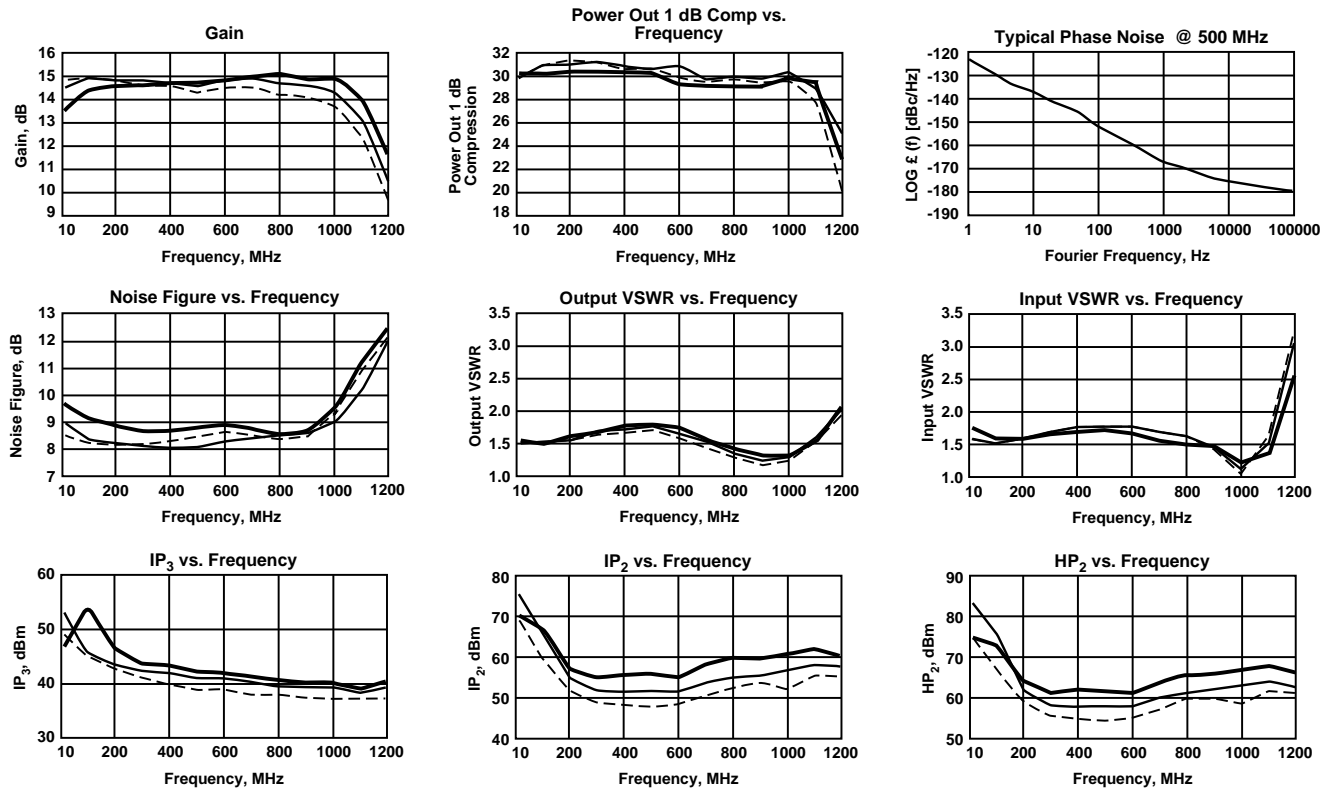


**Automatic Network Analyzer Measurements** (Typical production unit @ +25°C ambient)**S-Parameters and Numerical Readings****Bias = 18.00 Volts**

Freq. GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>		GPDEL (ns)	PHASE DEV (deg)
	Mag	Ang	dB	Ang	dB	Ang	Mag	Ang		
0.01	0.23	-167.6	14.43	24.0	-31.47	28.6	0.21	-168.04	—	—
0.02	0.21	-174.3	14.56	8.0	-31.27	13.6	0.21	-173.96	—	—
0.03	0.21	-176.2	14.64	0.5	-31.21	7.9	0.21	-176.53	—	—
0.04	0.20	-176.8	14.69	-4.8	-31.15	4.5	0.21	-177.98	—	—
0.05	0.20	-176.8	14.73	-9.3	-31.11	2.1	0.21	-179.07	1.04	-1.22
0.10	0.19	-173.7	14.82	-28.0	-30.99	-5.9	0.21	178.00	1.04	-3.02
0.15	0.20	-169.2	14.85	-45.0	-30.93	-11.9	0.22	175.45	.94	-3.04
0.20	0.21	-165.7	14.85	-61.5	-30.90	-17.6	0.23	172.23	.91	-2.53
0.25	0.22	-163.6	14.83	-77.8	-30.87	-22.9	0.24	168.04	.90	-1.83
0.30	0.24	-162.9	14.79	-93.9	-30.81	-28.3	0.25	162.72	.89	-.95
0.35	0.25	-163.2	14.75	-110.0	-30.75	-33.6	0.26	156.53	.88	-.03
0.40	0.27	-164.3	14.73	-126.1	-30.63	-39.2	0.27	149.52	.89	.90
0.45	0.27	-165.8	14.70	-142.3	-30.54	-44.9	0.27	141.89	.89	1.68
0.50	0.27	-167.1	14.58	-158.5	-30.51	-50.9	0.28	133.72	.89	2.54
0.55	0.28	-166.8	14.61	-173.4	-30.34	-56.0	0.27	121.84	.82	4.60
0.60	0.28	-168.4	14.77	170.1	-30.08	-62.0	0.25	111.47	.91	5.10
0.65	0.27	-169.4	14.87	152.8	-29.84	-69.0	0.23	100.32	.95	4.90
0.70	0.26	-169.7	14.92	135.1	-29.63	-76.4	0.21	89.00	.97	4.25
0.75	0.25	-169.2	14.93	116.8	-29.47	-84.3	0.18	78.29	1.00	3.08
0.80	0.24	-167.9	14.82	98.1	-29.42	-92.5	0.15	70.92	1.03	1.47
0.85	0.23	-169.2	14.68	80.0	-29.34	-99.1	0.13	63.66	.99	.46
0.90	0.20	-172.8	14.68	60.9	-28.97	-107.0	0.11	58.04	1.05	-1.61
0.95	0.15	-175.9	14.61	40.5	.28.73	-115.6	0.10	63.29	1.12	-4.97
1.00	0.08	-168.8	14.44	18.7	-28.26	-124.5	0.11	68.54	1.20	-9.75
1.05	0.06	-74.2	14.03	-4.6	-27.82	-136.2	0.15	68.18	1.27	—
1.10	0.19	-55.8	13.33	-28.7	-27.61	-149.6	0.21	58.79	1.33	—
1.15	0.34	-63.4	12.25	-53.3	-27.72	-164.2	0.27	44.89	1.36	—
1.20	0.50	-74.8	10.76	-77.4	-28.24	-178.9	0.33	30.30	1.35	—
1.25	0.62	-86.3	8.93	-100.1	-29.09	167.4	0.37	17.09	1.28	—
1.30	0.71	-96.8	6.89	-121.0	-30.17	155.1	0.40	6.11	1.18	—
1.35	0.78	-105.8	4.72	-140.3	-31.43	144.5	0.43	-2.53	1.09	—
1.40	0.83	-113.4	2.46	-158.5	-32.84	135.5	0.45	-9.11	1.02	—
1.45	0.86	-119.9	0.12	-175.9	-34.33	127.9	0.48	-14.40	.97	—
1.50	0.88	-125.6	-2.36	167.6	-35.91	122.1	0.52	-19.09	.91	—
1.60	0.90	-135.0	-7.93	138.1	-39.25	117.0	0.61	-28.62	—	—
1.70	0.92	-142.7	-14.24	116.6	-42.04	119.9	0.69	-38.97	—	—
1.80	0.92	-149.2	-20.81	103.5	-44.01	130.1	0.74	-48.41	—	—
1.90	0.92	-154.8	-27.95	102.2	-45.35	145.6	0.78	-56.35	—	—
2.00	0.91	-160.0	-34.42	121.0	-42.61	152.0	0.82	-63.47	—	—
2.10	0.90	-164.8	-37.72	171.1	-42.97	154.4	0.84	-69.19	—	—
2.20	0.90	-169.6	-33.97	-166.3	-42.38	157.9	0.86	-73.89	—	—
2.30	0.89	-174.4	-31.37	-164.2	-41.61	158.9	0.87	-77.93	—	—
2.40	0.87	-179.8	-29.37	-167.3	-40.63	158.9	0.87	-81.15	—	—
2.50	0.86	174.2	-27.95	-175.7	-39.74	156.8	0.87	-83.77	—	—



Linearization Range: .050 to 1.000 GHz

## Product Options

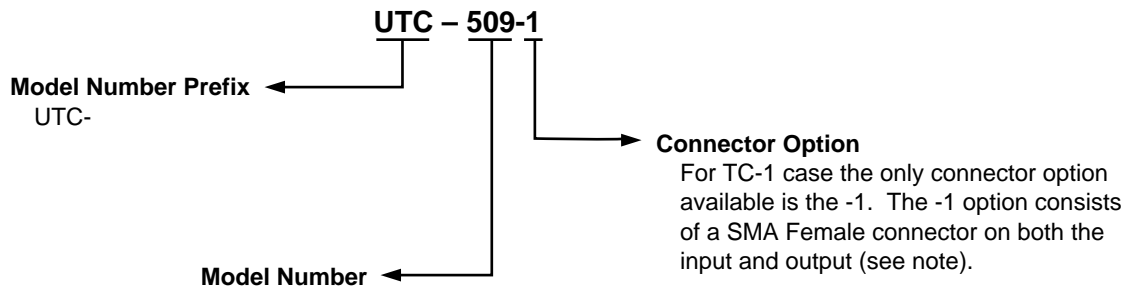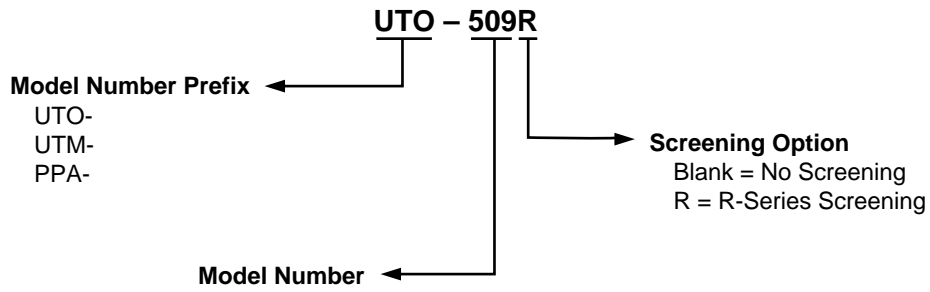

Note: R-Series screening is not available in the TC-1 case as the case is non-hermetic.

## Case Drawings TO-3

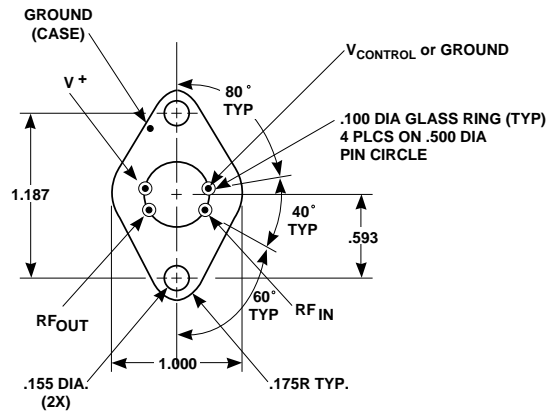


APPROXIMATE WEIGHT 14.5 GRAMS

### NOTES (UNLESS OTHERWISE SPECIFIED):

1. DIMENSIONS ARE SPECIFIED IN INCHES
2. TOLERANCES: xx  $\pm$  .02  
xxx  $\pm$  .010

# UCS-1P

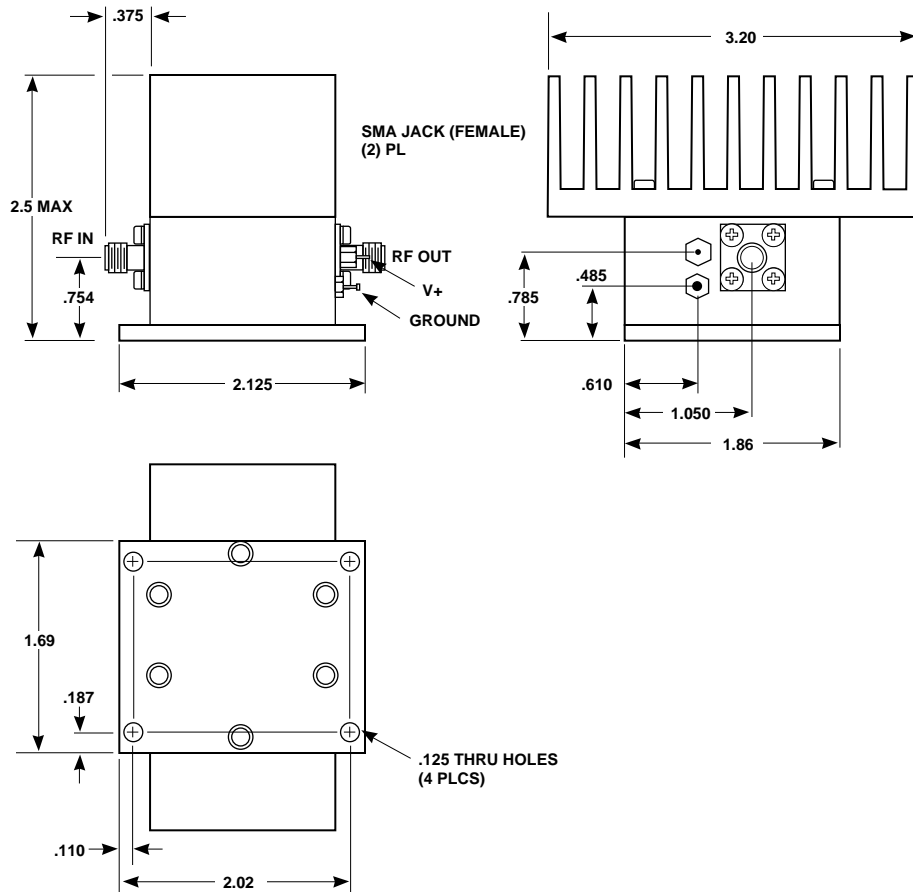

APPROXIMATE WEIGHT 281 GRAMS

- NOTES (UNLESS OTHERWISE SPECIFIED):
1. DIMENSIONS ARE SPECIFIED IN INCHES
  2. TOLERANCES: xx ± .02  
xxx ± .010
  3. THE CONNECTOR OPTION AVAILABLE FOR THE UCS-1P CASE IS THE -1, SMA FEMALE CONNECTORS AT BOTH INPUT AND OUTPUT PORTS.

Contact Teledyne Microwave Solutions:  
650-691-9800  
650-962-6845 fax

Check for updates:  
[www.teledynemicrowave.com](http://www.teledynemicrowave.com)