

AC2556

2000 TO 2500 MHz TO-8 CASCADABLE AMPLIFIER

Typical Values	AC2556
High Gain	21.5 dB
Low Noise Figure	1.5 dB
Medium Output Power	+15.0 dBm
High Performance Thin Film Standard Size TO-8 Package	

SPECIFICATIONS*

Parameter	Typical	Guaranteed	
		0 to 50 °C	-55 to +85 °C
Frequency (Min.)	1900-2500 MHz	2000-2500 MHz	2000-2500 MHz
Small Signal Gain (Min.)	21.5 dB	20.5 dB	20.0 dB
Gain Flatness (Max.)	±0.5 dB	±0.8 dB	±1.0 dB
Noise Figure (Max.)	1.5 dB	1.7 dB	2.0 dB
SWR (Max.) Input/Output	1.6:1	1.8:1	1.9:1
Power Output (Min.) @ 1dB comp.	+13.5 dBm	+12.5 dBm	+11.5 dBm
DC Current (Max.)	52 mA	48 mA	50 mA

* Measured in a 50-ohm system at +5 Vdc unless otherwise specified.

INTERMODULATION PERFORMANCE

Typical @ 25 °C	AC2556
Second Order Harmonic Intercept Point	+48 dBm
Second Order Two Tone Intercept Point	+42 dBm
Third Order Two Tone Intercept Point	+27 dBm


ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-62 to +125 °C
Maximum Case Temperature	+125 °C
Maximum DC Voltage	+10 Volts
Maximum Continuous RF Input Power	+10 dBm
Maximum Short Term Input Power (1 Minute Max.)	50 Milliwatts
Maximum Peak Power (3 μsec Max.)	0.5 Watt
Burn-in Temperature	+125 °C
Thermal Resistance ¹ (θ _{jc})	— °C/Watt
Junction Temperature Rise Above Case (T _{jc})	— °C

¹ Thermal resistance is based on total power dissipation.


AC2556

TO-8 Package for Amplifiers

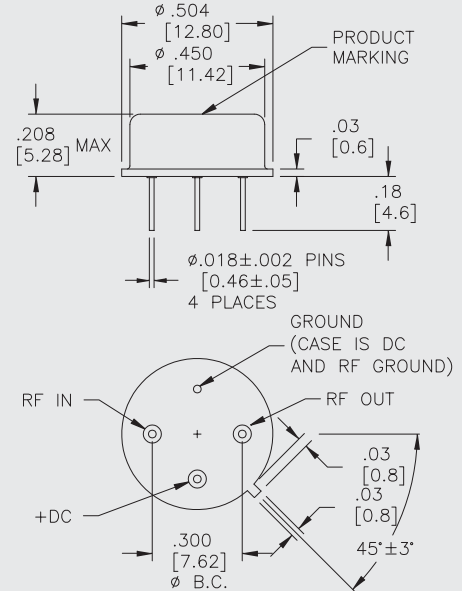

AS2556

SMT0-8 Package for Amplifiers

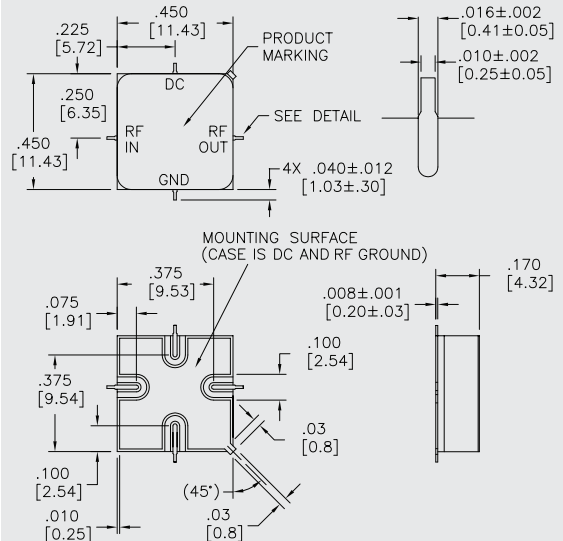

DIMENSIONS ARE IN INCHES [MILLIMETERS]